


IP RATED LINEAR WALL WASHER LUMINAIRES

THE TRILOBIT FAMILY



PRECILUM[®]
SPECIAL LED LIGHTING SOLUTIONS

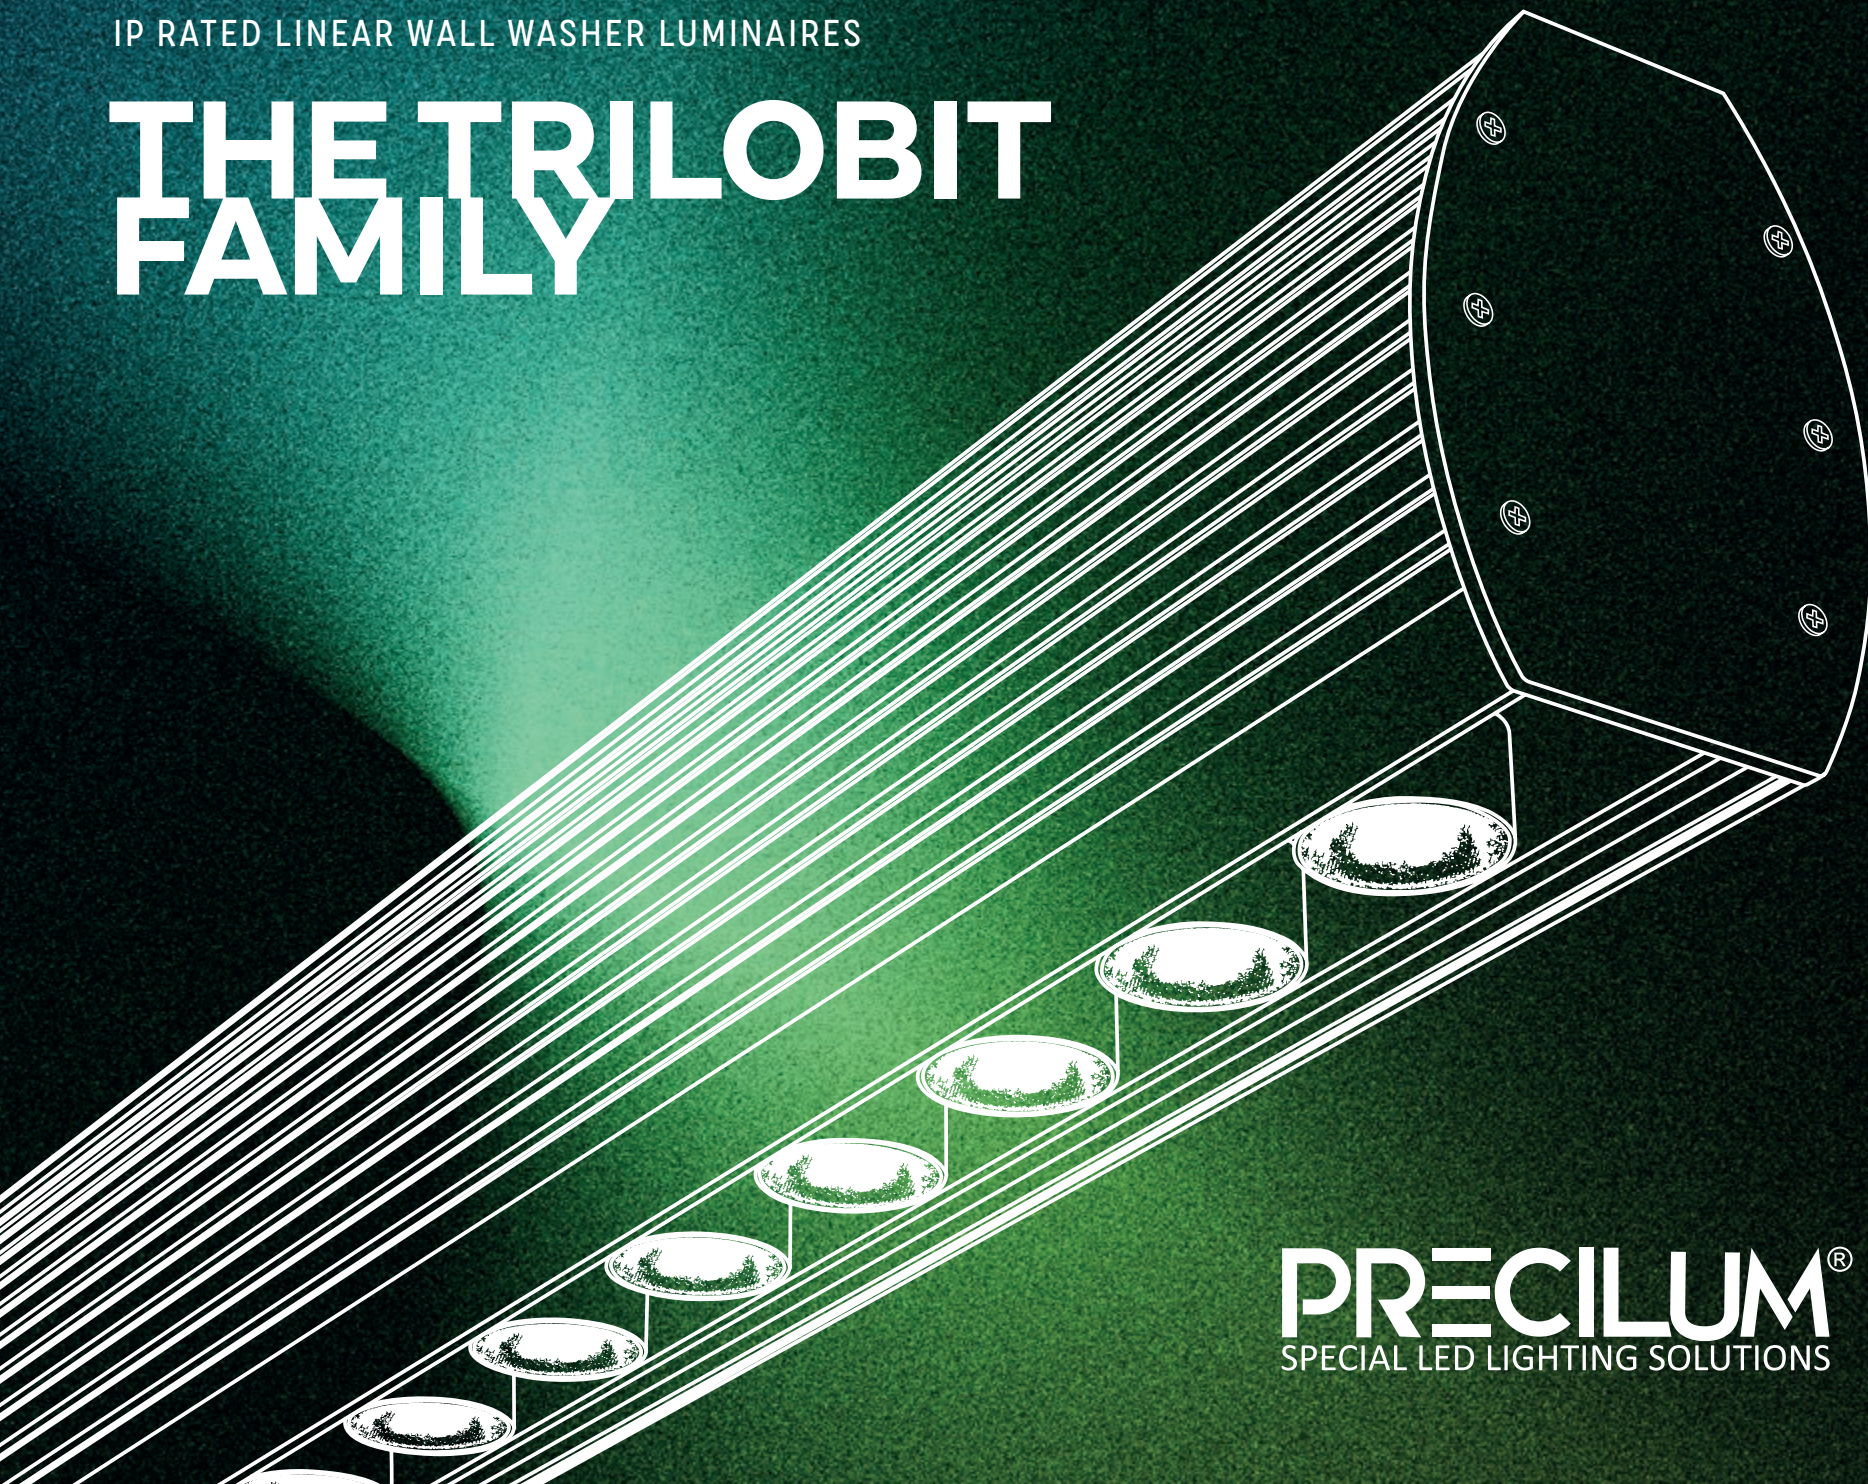

CONTENT

ABOUT 03

TRILOBIT MONOCHROMATIC 05

TRILOBIT RGB/RGBW 07


TRILOBIT ECO 09

TRILOBIT ABOUT

The use of quality materials and precision manufacturing offers professional lighting solutions.

It is ideally suited to use in facade application, especially for architectural buildings, landscaped areas, squares, bridges and others.

The refined thermal management system incorporates a sleek and robust heat-sink directly into the fixture to ensure maximum heat transfer and long life-time. Advanced LED optical design offers hundreds of photometrics options to meet your precise lighting requirements.

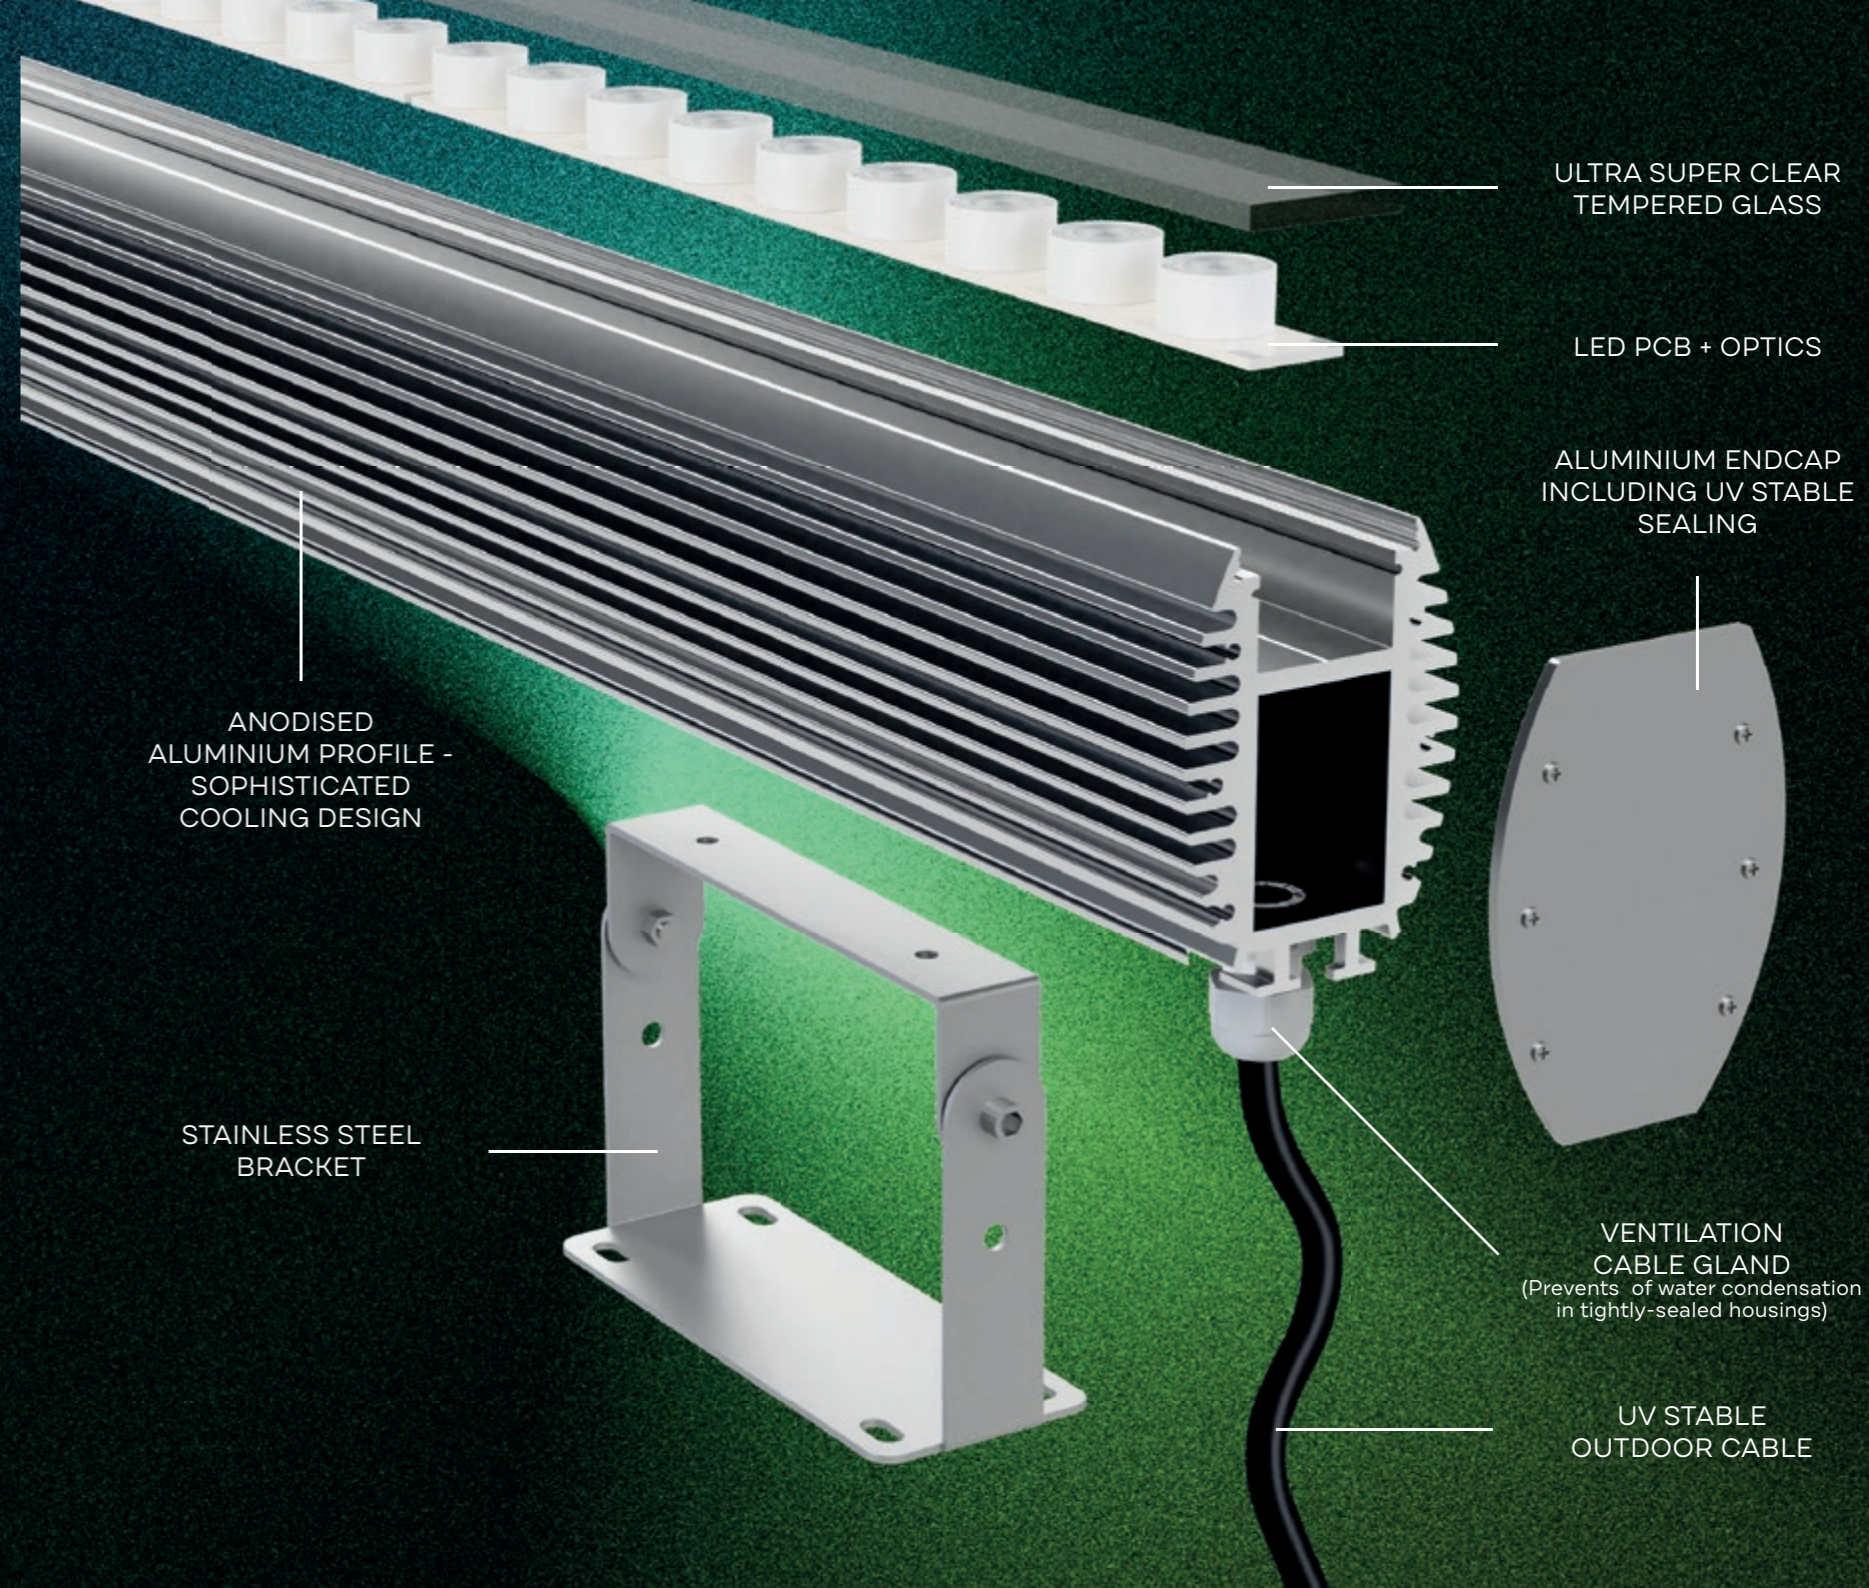

TRILOBIT MONO- CHROMATIC

Architectural lighting has never been easier with linear LED fixtures designed by PRECILUM. TRILOBIT's flexibility offers designers a powerful tool to meet the most demanding scenarios of placement, environment, and light distribution.



IP66



230V / 50HZ



OSRAM


INPUT VOLTAGE 230 V AC / 50 HZ OR 48 V DC

CONTROL ON/OFF, DALI

LED VARIANTS WHITE 2700K - 6500K OR RED, GREEN, BLUE, AMBER LEDS

VARIANTS

LENGHT	300 mm	600 mm	900 mm	1200 mm	1500 mm
POWER	14 W	27 W	41 W	54 W	67 W
LUMEN OUTPUT	1540 lm	2970 lm	4510 lm	5940 lm	7370 lm

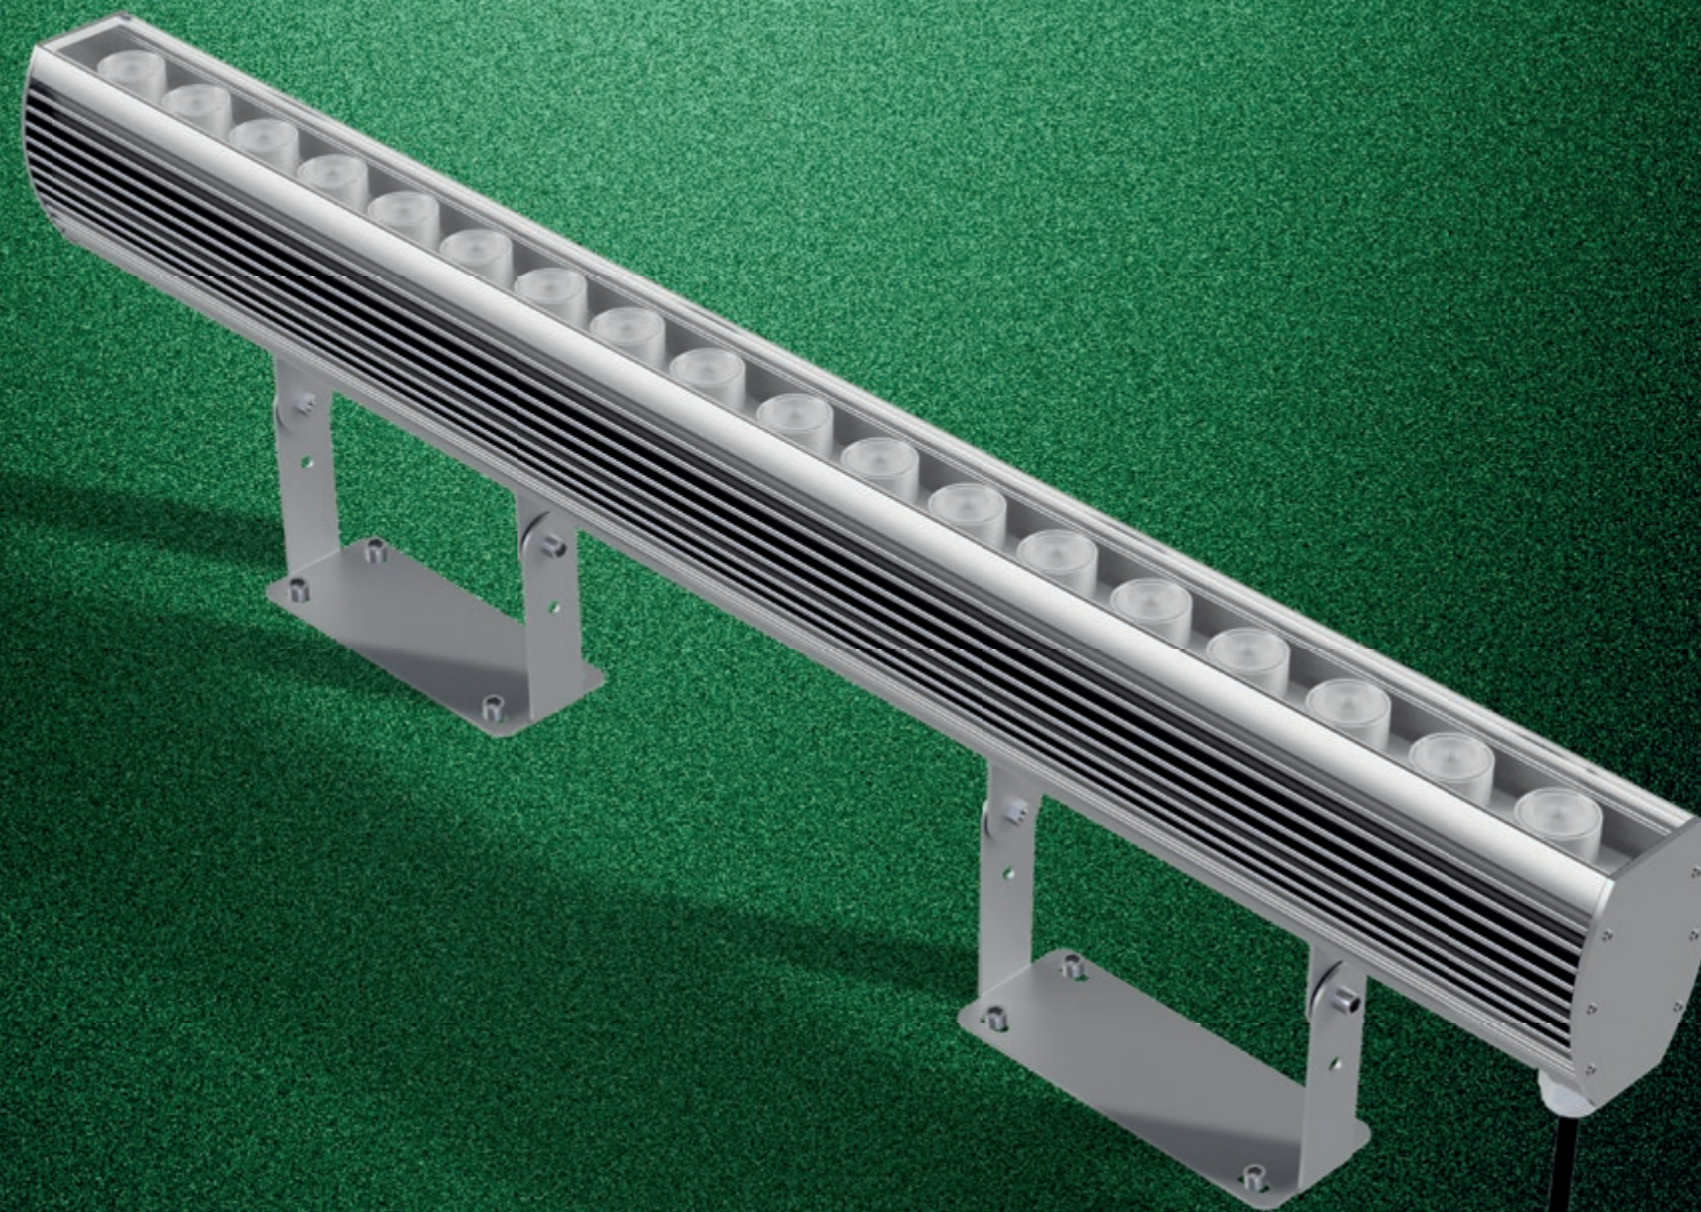

TRIOBIT RGB/RGBW

Advanced LED optical design offers hundreds of photometrics options to meet your precise lighting requirements, while delivering reduced glare and improved light control.

Full spectrum coverage by using RGB/RGBW colour for modern architecture or specifically highlight every single detail of historical buildings or monuments.



IP66



48V DC



OSRAM

INPUT VOLTAGE 48 V DC


CONTROL DMX, RDM

LED VARIANTS RGB, RGBW, RGBA AND OTHER ACCORDING REQUIRMENT

VARIANTS

LENGHT 300 MM 600 MM 900 MM 1200 MM 1500 MM

POWER RGB/RGBW 13/18 W 27/36 W 40/54 W 54/72 W -/72 W

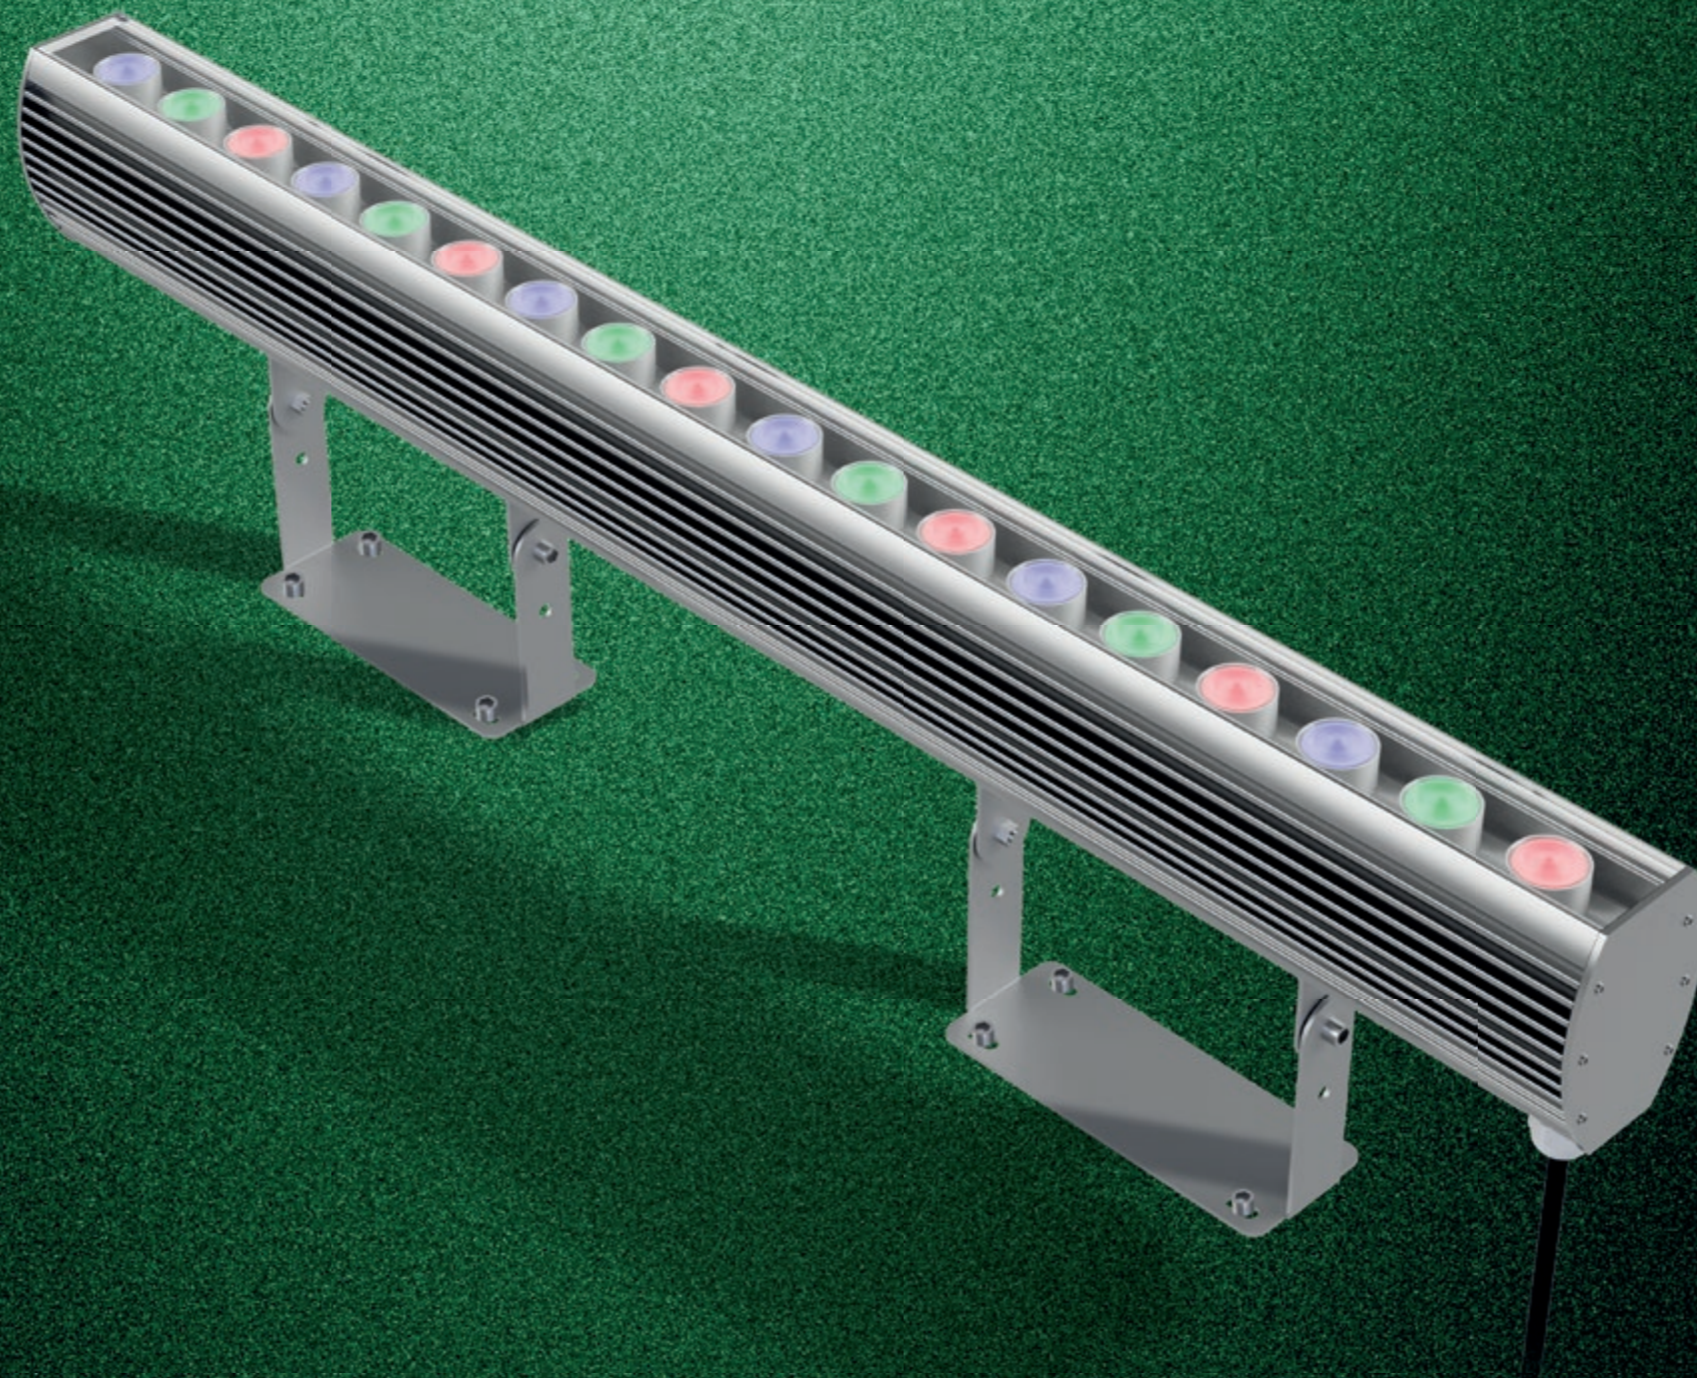

TRIOBIT ECO

Linear fixtures with the latest OSRAM/TRIDONIC LED technology for static or dynamic surface illumination. IP66 ensures safe operation in even the most demanding areas. Fixtures are renowned for longevity and high efficiency.



IP66



230V / 50HZ



TRIDONIC


INPUT VOLTAGE 230 V AC / 50 HZ

CONTROL ON/OFF, DALI

LED VARIANTS WHITE 2700K, 3000K, 3500 K, 4000K, 5000K, 5700K

VARIANTS

LENGHT	290 mm	570 mm	850 mm	1130 mm
LUMEN OUTPUT	900 lm	1550 lm	2500 lm	3250 lm
POWER	8 W	15 W	23 W	31 W

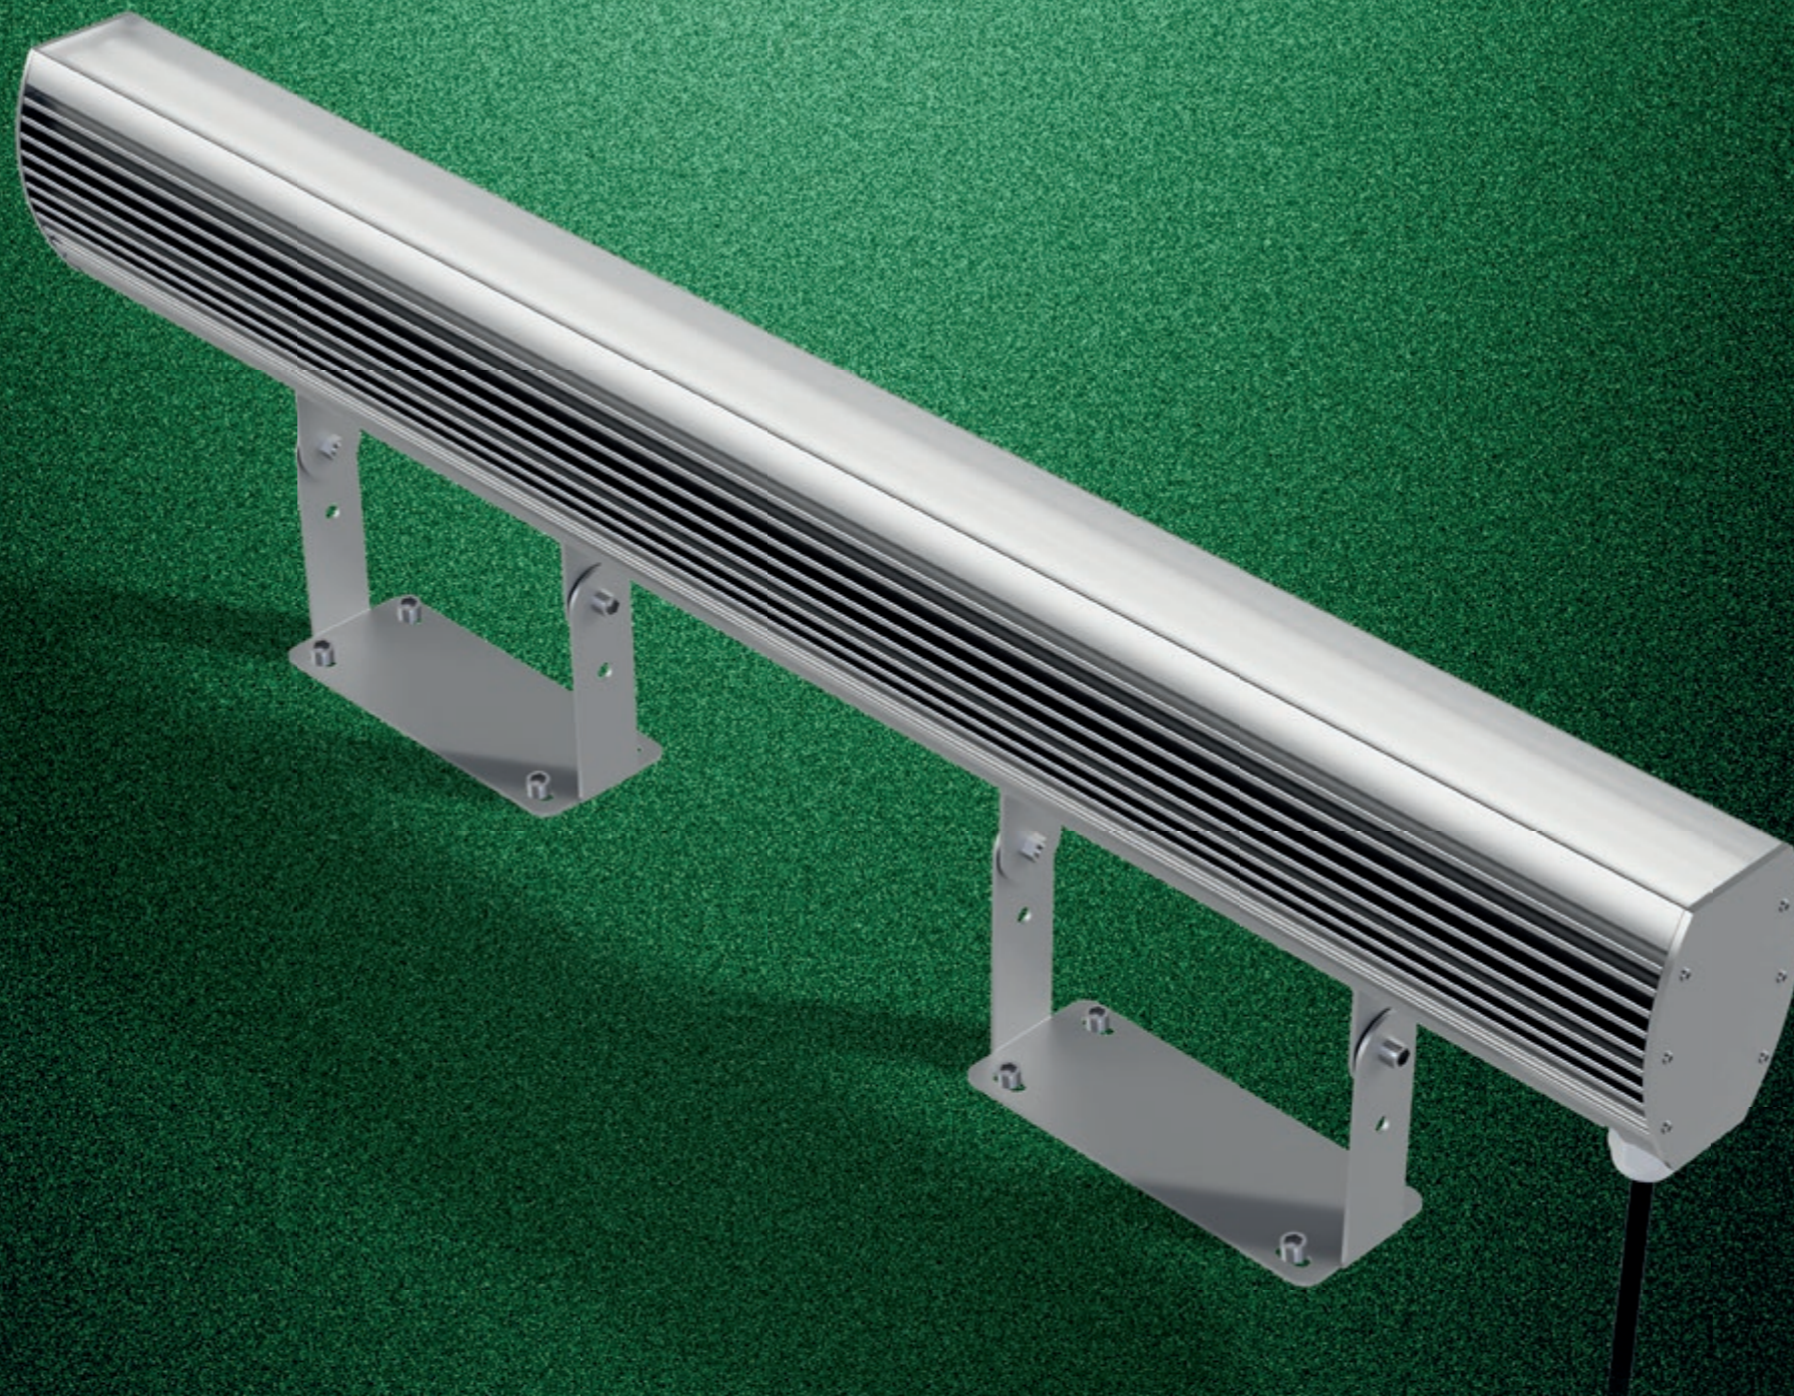

PRECILUM[®]
SPECIAL LED LIGHTING SOLUTIONS

CLEVER DESIGN
NEVER AGES...

757 01 VALASSKE MEZIRICI
CZECH REPUBLIC

SALES@PRECILUM.COM
+420 603 770 788

WWW.PRECILUM.COM