

PAGE 1/2

INGROUND MICRO BRASS 12/24V



The INGROUND series was designed using modern simulation methods in order to obtain the highest product quality.












			$\sim$ $^{\star}$ TT	ONC.
PRODU	$\cup$ $\cup$	TITOTE.	CAII	CINO

Working temperature range	-20°C ÷ +55°C	
Power consumption	2W	
IP protection class	IP67	
Lifetime L80B10	≥ 60 000h	
Impact resistance	IK10	
Protection class	III	
Connection	0.5m	
Wiring	H07RN-F 2X1.5	
Dimming	ON-OFF/PWM	
Luminous flux tolerance	±10%	
Angle of distribution	17°, 31°, 39°	

## DIMENSIONAL DRAWINGS




PAGE 2/2

## **INGROUND MICRO BRASS 12/24V**

## CONNECTION

Connecting to the power supply should be done when the power supply is off .

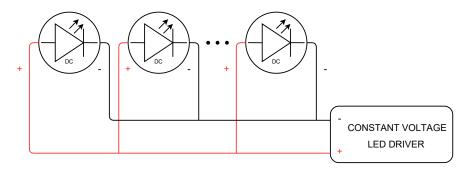

## **ACCESSORIES**

■ INGROUND MICRO ABS2 mounting accessory

