

## BOLLARD N




The BOLLARD series was designed using modern simulation methods in order to obtain the highest product quality.



### PRODUCT SPECIFICATIONS

Working temperature range	-20°C ÷ +55°C
Power consumption	24W
IP protection class	IP67
Lifetime L80B10	≥ 65 000h
Impact resistance	IK10
Protection class	I
Connection	0.5m
Body material	ALUMINIUM
Dimming	ON-OFF/DALI-2 DT6
Luminous flux tolerance	±10%
Angle of distribution	360°

### DIMENSIONAL DRAWINGS

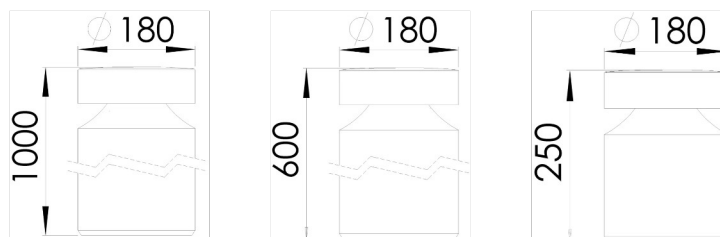

## BOLLARD N

### CONNECTION

Connecting to the power supply should be done when the power supply is off .

