PAGE 1/2

SOPHIA STANDARD SMOOTH BRASS 12/24V



The FLOODLIGHTS series was designed using modern simulation methods in order to obtain the highest product quality.












PROD			

Working temperature range	-20°C ÷ +55°C
Power consumption	6W
IP protection class	IP67
Lifetime L80B10	≥ 60 000h
Impact resistance	IK10
Protection class	III
Connection	0.5m
Wiring	H07RN-F 2X1.5
Dimming	ON-OFF/PWM
Luminous flux tolerance	±10%
Angle of distribution	10°, 20°, 45°

DIMENSIONAL DRAWINGS






PAGE 2/2

SOPHIA STANDARD SMOOTH BRASS 12/24V

CONNECTION

Connecting to the power supply should be done when the power supply is off .

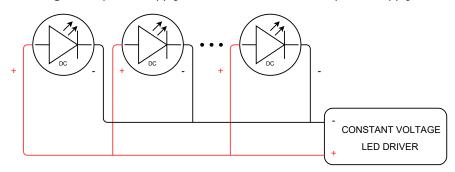

ACCESSORIES

■ SOPHIA STANDARD SPIKE+PLATE mounting accessory

